

# MEMOPOWER PLUS RT SERIES

6~10kVA  
3:1 phase PF: 0.9



## Features

- Online-Double conversion
- Output transfer time is 0ms
- PFC technology
- Full digital control (DSP)
- Output power factor: 0.9
- Input current harmonic: <5%
- ECO function
- Charging/Rectifier/Inverter fully digital control technology
- Optimization battery group, the quantity of battery: 16/18/20 pieces (optional)
- Wide input voltage range: 208~478Vac or 120~276Vac
- Wide input frequency range: 45-55Hz/54-66Hz
- Self-testing when UPS startup
- Input over/under-voltage protection
- Automatic bypass
- DC start
- Communication port: USB, RS232
- Options: SNMP card/Relay card



The LCD panel can be rotated



Control Panel




Battery Cabinets  
(Optional)

## Technical Specifications:

MODEL		MP RT 6kVA	MP RT 10kVA
Capacity (VA/Watts)		6k / 5.4k	10k / 9k
<b>INPUT</b>			
Nominal voltage		380/400/415Vac(3Ph+N+PE) or 220/230/240Vac(L+N+PE)	
Operating voltage range		208~478Vac or 120Vac~276Vac	
Operating frequency range		50Hz:45~55Hz;60Hz:54~66Hz(auto sensing)	
Power factor		≥0.99	
Bypass voltage range		Max. voltage: 220V: +25%(optional +10%,+15%,+20%) 230V: +20% (optional +10%,+15%) 240V: +15% (optional +10%) Min. voltage: -45% (optional -20%,-30%)	
Bypass frequency range		Frequency protection range: ±10%	
ECO range		Same as bypass	
Harmonic distortion (THDi)		≤5%(100% linear load)	
Generator input		Support	
<b>OUTPUT</b>			
Output voltage		220/230/240Vac	
Power factor		0.9	
Voltage regulation		±1%	
Frequency	Line Mode	±1%/±2%/±4%/±5%/±10% of the rated frequency(optional)	
	Bat. Mode	50/60(±0.1)Hz	
Crest factor		3:1	
Harmonic distortion (THDv)		≤2% with linear load ≤5% with non-linear load	
Efficiency		>93.5%	
<b>BATTERY</b>			
Battery voltage		±96/108/120Vdc (optional)	
Backup time		Long run unit depends on the capacity of external batteries Estimated remaining time displayed on the LCD	
Typical recharge time		6~8 hours (to 90% of full capacity)	
Charge current		Maximum Current 10A; charge current can be set according to battery capacity installed.	
<b>SYSTEM FEATURES</b>			
Transfer time		Mains to Battery:0ms; Mains to Bypass:0ms	
Overload	Line Mode	Load≤110%:60min; ≤125%:last 10min; ≤150%:last 1min;>150% turn to bypass mode	
	Bypass Mode	40A(Input breaker)	60A(Input breaker)
Short Circuit		Hold Whole System	
Overheat		Line Mode: Turn to Bypass; Backup Mode: Shut down UPS immediately	
Low battery voltage		Alarm and Switch off	
Self-diagnostics		Upon Power On and Software Control	
Battery		Advanced Battery Management	
Audible & Visual alarms		Line Failure, Battery Low, Overload, System Fault	
Status LED & LCD display		Line Mode, Bat. Mode, Eco Mode, Bypass Mode, Battery Low, Battery Bad, Overload & UPS Fault	
Reading on the LCD display		Input Voltage, Input Frequency, Output Voltage, Output Frequency, Load Percentage, Battery Voltage, Inner Temperature & Remaining Battery Backup Time	
Communication interface		RS232,USB,SNMP card(optional), Relay card (optional)	
<b>ENVIRONMENTAL</b>			
Operating temperature		0℃~40℃	
Storage temperature		-25℃~55℃	
Humidity range		0~95% (non-condensing)	
Altitude		< 1500m	
Noise level		<55dB	
<b>PHYSICAL</b>			
Dimension D×W×H (mm)		580×443×131(3U)	
Net weight (kg)		23	25
<b>STANDARDS</b>			
Safety		IEC/EN62040-1,IEC/EN60950-1	
EMC		IEC/EN62040-2,IEC61000-4-2,IEC61000-4-3,IEC61000-4-4, IEC61000-4-5,IEC61000-4-6,IEC61000-4-8	
<b>BATTERY BANK</b>			
Model		MEMO -BR Series	
Battery type& Max.quantity		7Ah×20	9Ah×20
<b>PHYSICAL OF BATTERY BANK</b>			
Dimensions D×W×H (mm)		720×443×131(3U)	
Net weight (kg)		30 (3:1) / 19 (1:1)	31 (3:1) / 20 (1:1)

Specifications are subject to change without prior notice.

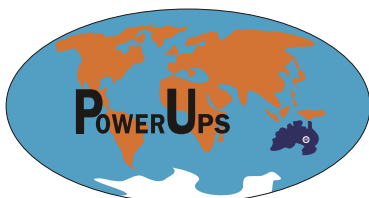

## Australia PowerUps

Address : 73 Boomerang Place, Seven Hills, NSW 2147, Australia

Website : [www.powerups.com.au](http://www.powerups.com.au)

Tel : 61 2 9831 8412

Email : [enquiry@powerups.com.au](mailto:enquiry@powerups.com.au)